



Department of
Parks and Wildlife



TYPICAL TRAFFIC CONTROL DIAGRAM

ROUTINE OPERATIONS

TASK: Full Road Closure

NOTES

- 1: Suitable for a full road closure.
- 2: All public access prohibited.
- 3: A suitable detour route shall be available.

SIGNAGE SPACING

"D" (metres), for the positioning of signs, is related to the speed of traffic as follows


DIMENSION "D"

Speed of traffic km/h	Dimension "D" m
55 or less	15
56 - 65	45
Greater than 65	Equal to posted speed of traffic

SIGNAGE REQUIREMENTS

SIGN	QUANTITY
	4
DO NOT O'TAKE	
	4
CONTROLLED BURN	
	4
REDUCE SPEED	
	4
DRIVE SAFELY	
← DETOUR	1
DETOUR →	1
ROAD CLOSED	2
→	As Required
	4
SIGN LEGS	32 min

Signs and Spacing's the
same as below

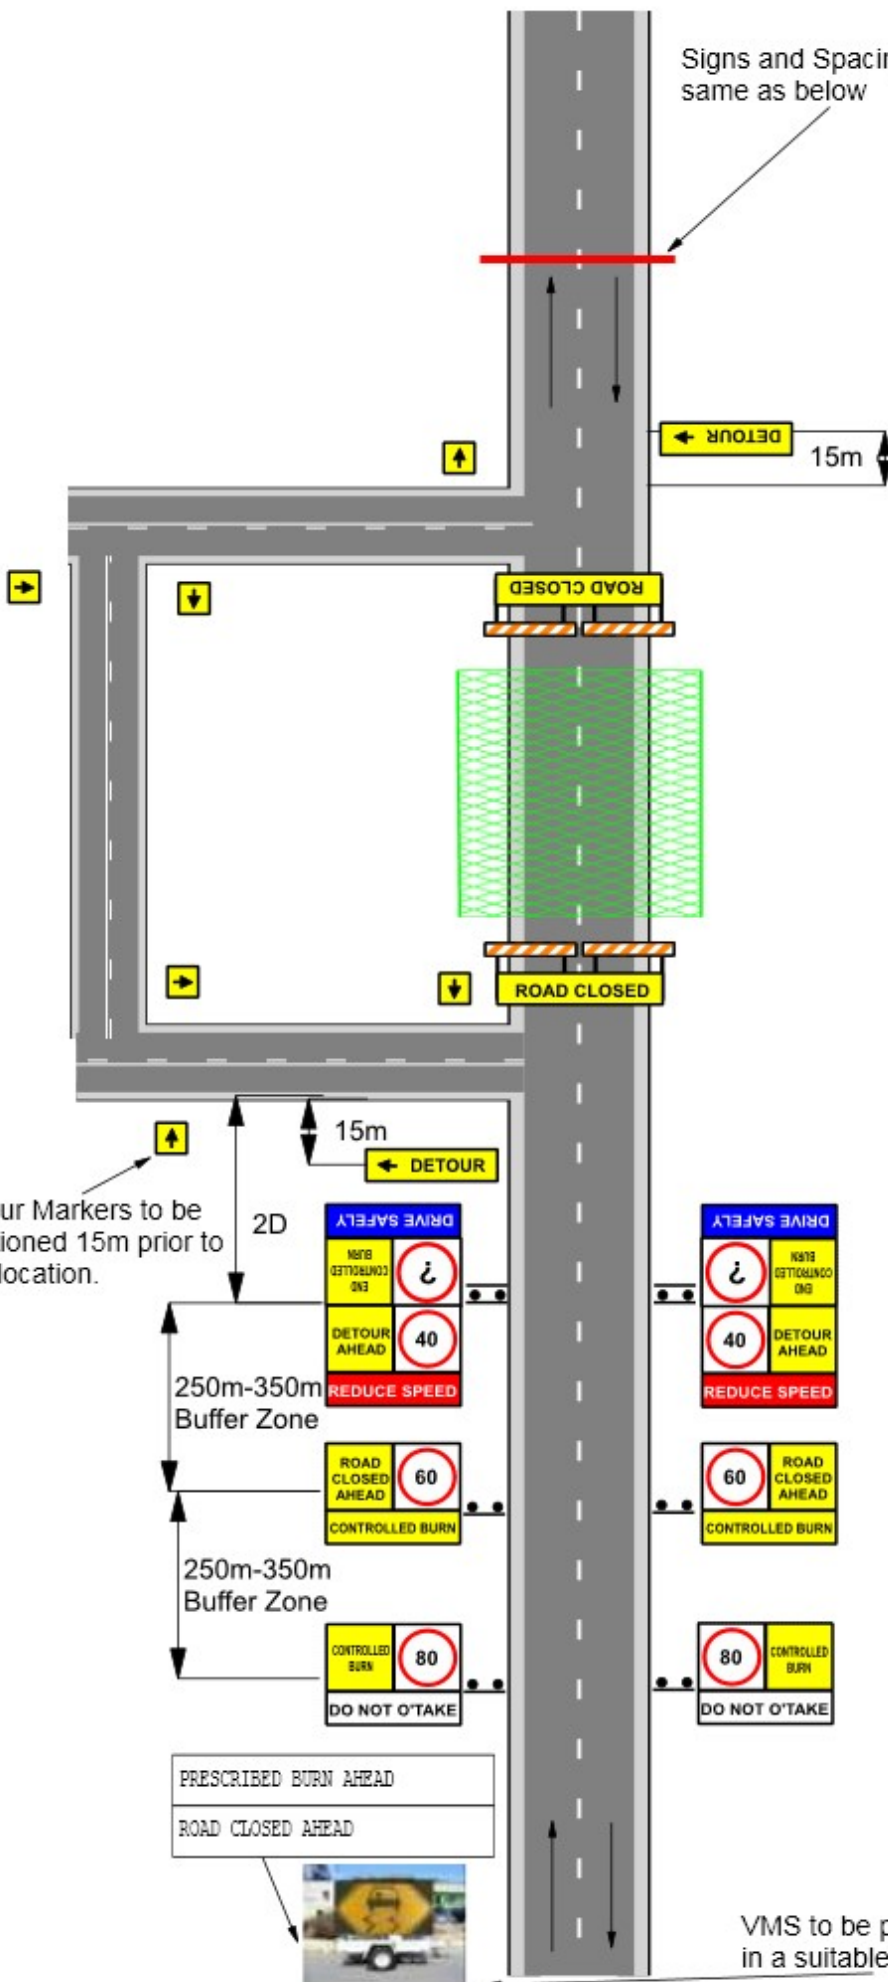

Detour Markers to be
positioned 15m prior to
turn location.

VMS to be positioned
in a suitable location

TCD No: DPAW PB 005

Rev No: 1

Date: 31/03/2014

Drawn By: Jade Saunders
AWTM: KTS-AWTM-14-39792-04

Signed:

Designed By: Paul Cassidy
AWTM: ETA/AV/11/5039/02

Signed: