








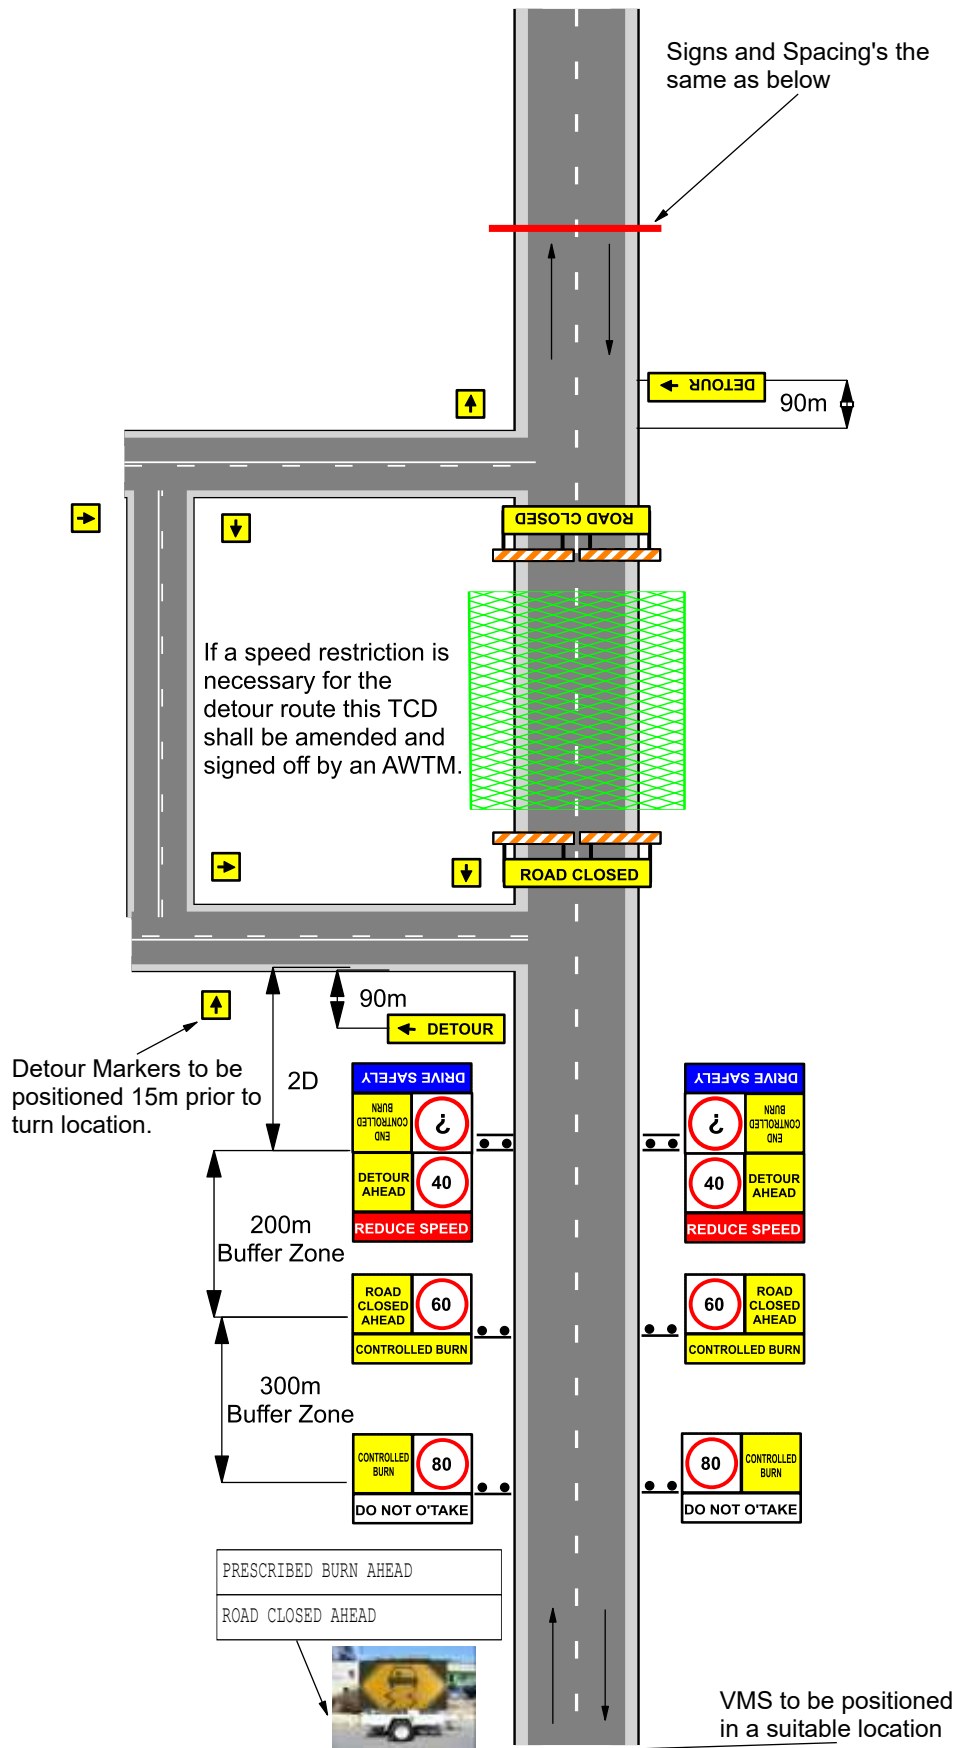
	
TYPICAL TRAFFIC CONTROL DIAGRAM	
ROUTINE OPERATIONS	
TASK: Full Road Closure	
NOTES	
1: Suitable for a full road closure. 2: All public access prohibited. 3: A suitable detour route shall be available. 4: Use a standard approach to reduce speed in 20km/h increments as per AS1742.3	
SIGNAGE SPACING	
"D" (metres), for the positioning of signs, is related to the speed of traffic as follows	
DIMENSION "D"	
Speed of traffic km/h	Dimension "D" m
55 or less	15
56 - 65	45
Greater than 65	Equal to posted speed of traffic
SIGNAGE REQUIREMENTS	
SIGN	QUANTITY
 	4
DO NOT O'TAKE	
 	4
CONTROLLED BURN	
 	4
REDUCE SPEED	
 	4
DRIVE SAFELY	
← DETOUR	1
DETOUR →	1
ROAD CLOSED	2
→	As Required
	4
SIGN LEGS	32 min



TCD No: DPAW PB 005

Rev No: 2

Date: 02/05/2016

Drawn By: Jade Saunders  
AWTM: KTS-AWTM-14-39792-04Signed: Amended By: Joel Rebello  
AWTM: KTS-AWTM-15-43243-02Designed By: Paul Cassidy  
AWTM: KTS-AWTM-14-34767-02Signed: 